




**Shutter/Guard Mount  
Exhaust Fans**

**AIR CONDITIONING PRODUCTS COMPANY**

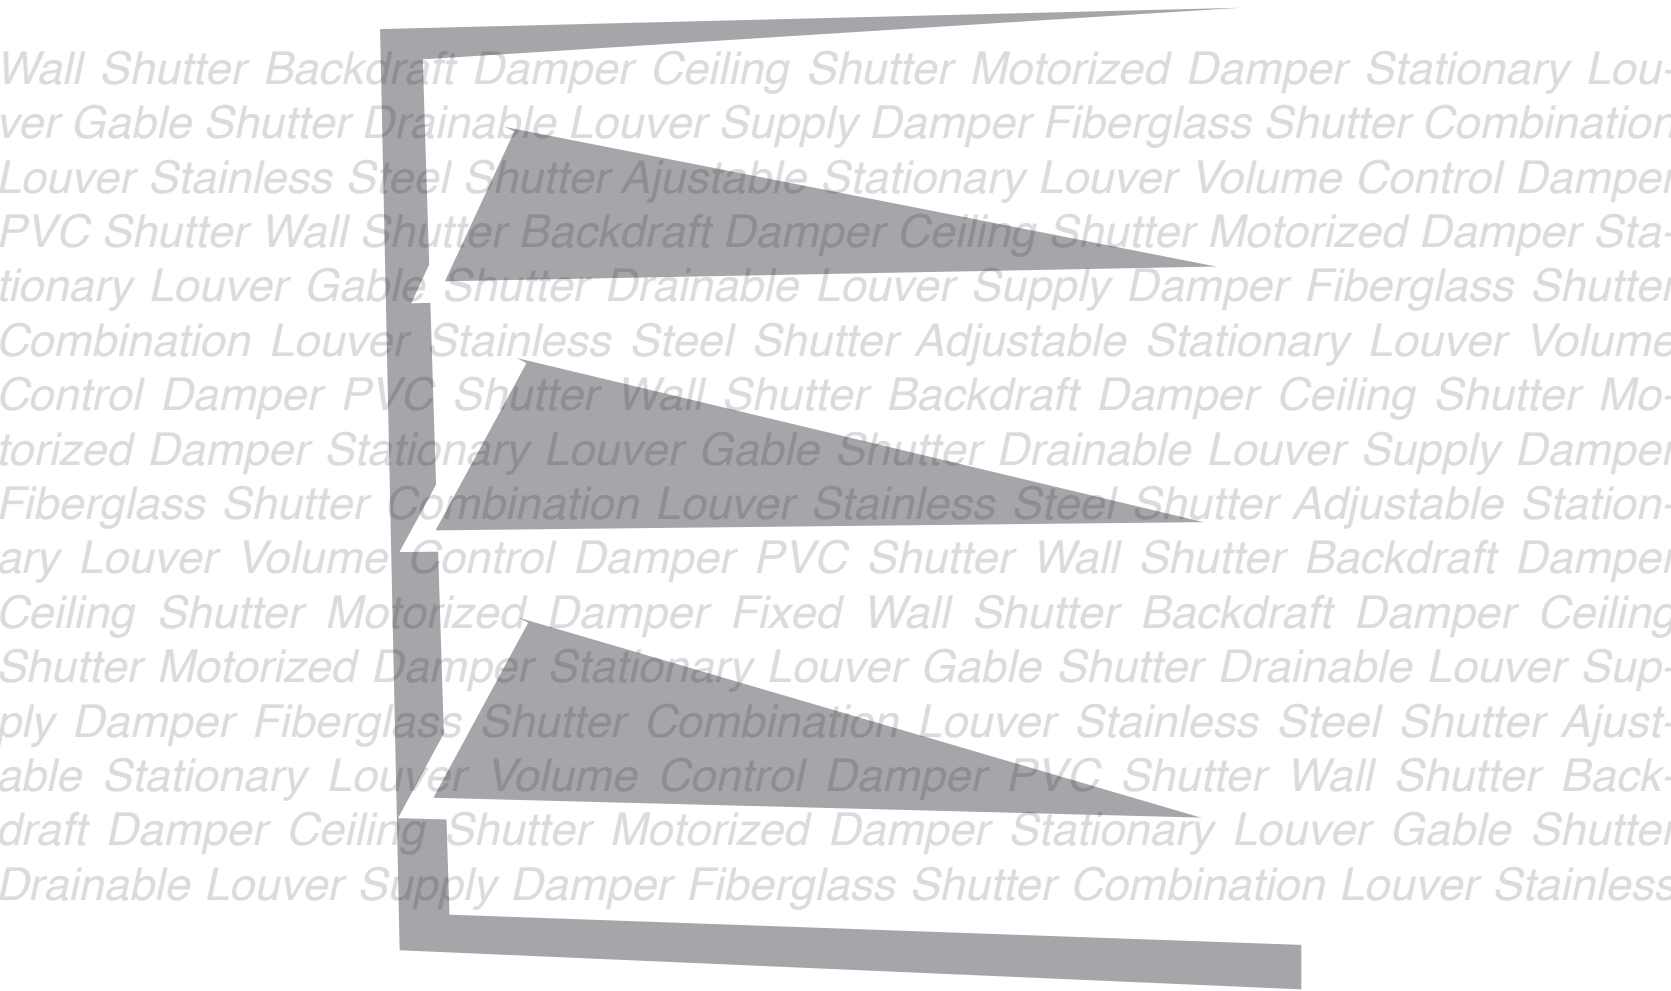

*Wall Shutter Backdraft Damper Ceiling Shutter Motorized Damper Stationary Lou-  
ver Gable Shutter Drainable Louver Supply Damper Fiberglass Shutter Combination  
Louver Stainless Steel Shutter Ajustable Stationary Louver Volume Control Damper  
PVC Shutter Wall Shutter Backdraft Damper Ceiling Shutter Motorized Damper Sta-  
tionary Louver Gable Shutter Drainable Louver Supply Damper Fiberglass Shutter  
Combination Louver Stainless Steel Shutter Adjustable Stationary Louver Volume  
Control Damper PVC Shutter Wall Shutter Backdraft Damper Ceiling Shutter Mo-  
torized Damper Stationary Louver Gable Shutter Drainable Louver Supply Damper  
Fiberglass Shutter Combination Louver Stainless Steel Shutter Adjustable Station-  
ary Louver Volume Control Damper PVC Shutter Wall Shutter Backdraft Damper  
Ceiling Shutter Motorized Damper Fixed Wall Shutter Backdraft Damper Ceiling  
Shutter Motorized Damper Stationary Louver Gable Shutter Drainable Louver Sup-  
ply Damper Fiberglass Shutter Combination Louver Stainless Steel Shutter Ajust-  
able Stationary Louver Volume Control Damper PVC Shutter Wall Shutter Back-  
draft Damper Ceiling Shutter Motorized Damper Stationary Louver Gable Shutter  
Drainable Louver Supply Damper Fiberglass Shutter Combination Louver Stainless*

**Manufacturer**

**QUALITY PRODUCTS FOR AIR MOVEMENT EQUIPMENT**

**Air Conditioning Products Company**  
30350 Ecorse Road, Romulus, Michigan 48174  
Phone: 734.326.0050 • Fax: 734.326.9632 • [www.acpshutters.com](http://www.acpshutters.com)



# SHUTTER/GUARD MOUNT EXHAUST FANS

QUALITY PRODUCTS FOR AIR MOVEMENT EQUIPMENT

## SHUTTER-MOUNT EXHAUST FANS

These easy-to-install, highly efficient exhaust fans have all aluminum improved leakage performance shutters, making them ideal for use in ventilating retail stores, offices, factories, work shops, garages and farm buildings. They are shipped fully assembled with 115 Volt totally enclosed motors and OSHA-compliant polyester powder-coated wire guards. UL and C-UL Listed.

PROPELLER DIA. (IN.)	CFM @ 0.000" SP	CFM @ 0.125" SP	MOTOR RPM	MOTOR HP	SQ. OPENING REQ. (IN.)	ITEM NO.
<b>SPEED CONTROLLABLE</b>						
7	140	--	1550	1/25	8-1/2	<b>SMF 08A</b>
10	585	285	1550	1/25	10-1/2	<b>SMF 10A</b>
12	800	470	1550	1/25	13	<b>SMF 12A</b>
16	1095	720	1550	1/20	17	<b>SMF 16A</b>
18	1860	850	1075	1/15	19	<b>SMF 18A</b>
20	2830	2255	1100	1/4	21	<b>SMF 20D</b>
24	3240	2485	1075	1/4	25	<b>SMF 24C</b>
<b>SINGLE-SPEED</b>						
18	2590	2190	1725	1/4	19	<b>SMF 18B</b>
20	2955	2450	1725	1/4	21	<b>SMF 20C</b>
24	3970	3240	1075	1/3	25	<b>SMF 24D</b>

## GUARD-MOUNT EXHAUST FANS

Designed for low-pressure exhausting and cooling applications. Sturdy steel wire guards are OSHA-compliant with a gray polyester powder-coated finish with 4 mounting loops for easy installation. They are shipped fully assembled with 115 Volt totally enclosed motors. UL and C-UL listed.

PROPELLER DIA. (IN.)	CFM @ 0.000" SP	CFM @ 0.125" SP	MOTOR RPM	MOTOR HP	SQ. OPENING REQ. (IN.)	ITEM NO.
7	230	--	1550	1/25	9-5/8	<b>GMF 08A</b>
10	595	405	1550	1/25	11-11/16	<b>GMF 10A</b>
12	820	535	1550	1/25	13-1/2	<b>GMF 12A</b>
16	1060	585	1550	1/20	17-3/8	<b>GMF 16A</b>
18	2515	1780	1725	1/4	20-13/16	<b>GMF 18A</b>
20	2600	1685	1725	1/4	22-3/4	<b>GMF 20A</b>
24	3840	2690	1075	1/3	26-7/8	<b>GMF 24A</b>

### FIBERGLASS SHUTTER-MOUNT EXHAUST FANS

These easy-to-install exhaust fans come fully assembled with a fiberglass automatic shutter and frame with stainless steel hardware for superior resistance to corrosive gases and vapors. The propellers are fiberglass-reinforced polypropylene. Fans include 115 Volt totally enclosed motors and an OSHA-compliant epoxy-coated wire guard. UL and C-UL Listed.

*Note: Not designed for explosive atmospheres or laboratory hood exhausts.*

PROPELLER DIA. (IN.)	CFM @ 0.000" SP	CFM @ 0.125" SP	MOTOR RPM	MOTOR HP	SQ. OPENING REQ. (IN.)	ITEM NO.
10	524	379	1550	1/20	10-1/2	<b>CRF 10A</b>
12	1100	799	1625	1/8	13	<b>CRF 12A</b>
16	2005	1678	1625	1/6	17	<b>CRF 16A</b>
18	2790	1961	1075	1/4	19	<b>CRF 18A</b>
20	3642	2838	1075	1/3	21	<b>CRF 20A</b>
24	4876	4197	1075	1/2	25	<b>CRF 24A</b>



**Shutter-Mount  
Exhaust Fan -  
SMF 12A**



**Guard-Mount  
Exhaust Fan -  
GMF 12A**



**Fiberglass  
Shutter-Mount  
Exhaust Fan -  
CRF 16A**

Family owned and operated for three generations, Air Conditioning Products Company (ACP) is a world-class manufacturer of shutters, dampers, louvers, and other products for air movement equipment. ACP has been in continuous operation since 1947.

ACP is based in Romulus, Michigan, USA. We proudly manufacture our products with union labor in our 100,000 square foot state of the art facility. We specialize in fulfilling strict requirements for quality and reliability while combining short lead times with the flexibility to handle orders of all sizes and quantities.

We specialize in backdraft dampers, wall shutters, ceiling shutters, gable shutters, motorized dampers, stationary louvers and contract / private label manufacturing. Our products are used in industrial, commercial, residential and agricultural applications. Our broad customer base includes leading HVAC manufacturers, OEM's, national and regional distributors, manufacturer representatives, as well as industry-specific companies.

Air Conditioning Products Company is more than just a manufacturing supplier, we offer solutions for the HVAC industry.

**For more information or questions please contact us at (734) 326-0050 or visit our website at [www.acpshutters.com](http://www.acpshutters.com).**

